


FRONT

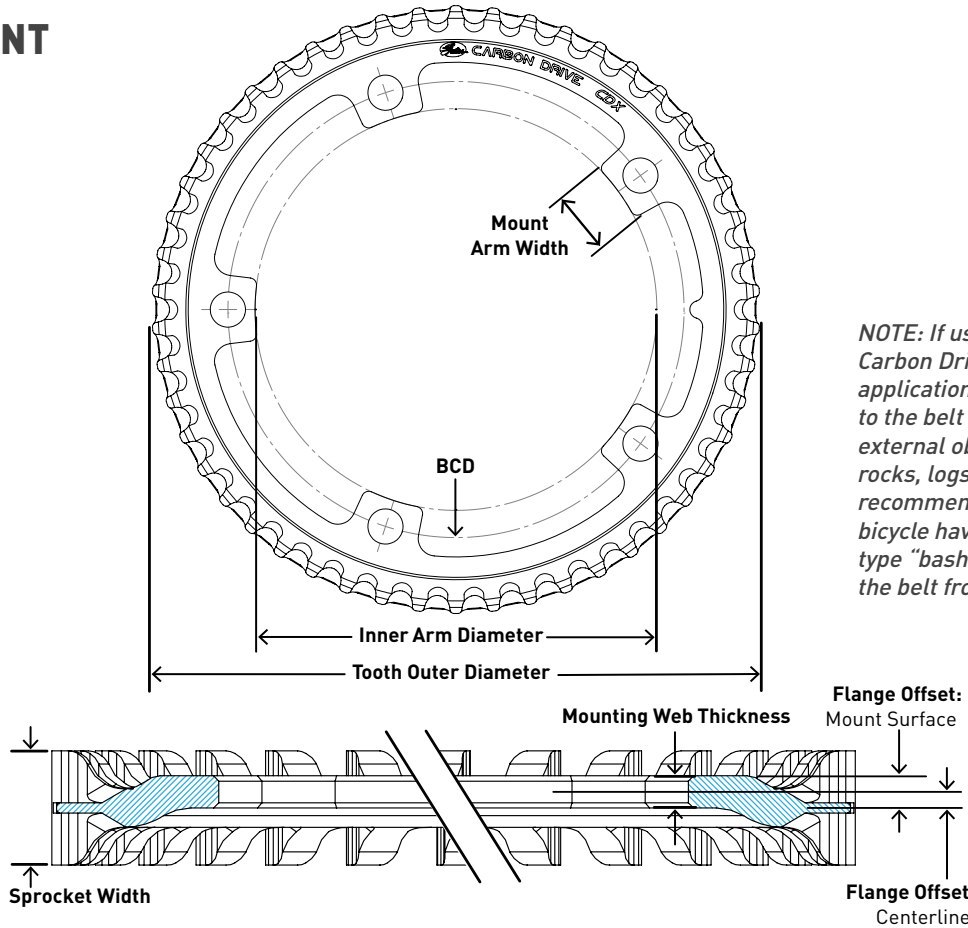

NOTE: If using the Gates Carbon Drive system in an application where impact to the belt is possible by external objects (large rocks, logs, etc.), it is highly recommended that the bicycle have a structural-type "bash" guard to protect the belt from impact.

CDX FRONT: SPROCKET DIMENSIONS

Teeth	No. of Bolt Holes	Part Number	Mounting Arm Width	BCD	Inner Arm Diameter	Tooth O.D.	Mounting Web Thickness	Sprocket Width	Flange Offset Mount Surface	Flange Offset Centerline
39	4	CT11394AA	19	104	88.0	134.8	3.1	11	3.1	1.55
42	4	CT11424AA	19	104	88.0	145.2	3.1	11	3.1	1.55
46	4	CT11464AA	19	104	88.0	159.3	3.1	11	3.1	1.55
50	4	CT11504AA	19	104	88.0	173.2	3.1	11	3.1	1.55
55	4	CT11554AA	19	104	88.0	190.7	3.1	11	3.1	1.55
46	5	CT11465AA	18	130	114.5	159.3	3.1	11	3.1	1.55
50	5	CT11505AA	18	130	114.5	173.2	3.1	11	3.1	1.55
55	5	CT11555AA	18	130	114.5	190.7	3.1	11	3.1	1.55
60	5	CT11605AA	18	130	114.5	208.2	3.1	11	3.1	1.55
70	5	CT11705AA	18	130	114.5	243.2	3.1	11	3.1	1.55
50	5	CT11505AA-D*	17	130	114.5	173.2	3.1	11	3.85	2.3
55	5	CT11555AA-D*	17	130	114.5	190.7	3.1	11	3.85	2.3
60	5	CT11605AA-D*	17	130	114.5	208.2	3.1	11	3.85	2.3

* SHIMANO Alfine Di2 specific.

CDX:TANDEM

66	5	CT08665AA	21	130	114.5	166.3	3.1	11	3.1	1.55
69	5	CT08695AA	21	130	114.5	174.2	3.1	11	3.1	1.55
74	5	CT08745AA	21	130	114.5	186.8	3.1	11	3.1	1.55

Note: Tandem sprockets and Front sprockets are not interchangeable. Tandem sprockets have an 8mm tooth pitch, while Front sprockets have an 11mm tooth pitch.